

# EFI-P4 AC 40/0.1



## Specifications

ETI Code	002061622
Description	EFI-P4 AC 40/0.1
Class name	RCCB
Rated current (A)	40
Type	AC
Current type	AC
Rated voltage (V)	415
Depth (mm)	68
No. Of poles	3+N
IP rating	IP20
Mounting	DIN rail
Rated Frequency (Hz)	50/60
Standards	IEC/EN 61008
Terminals (mm <sup>2</sup> )	1-25
Rated residual operating current I <sub>Δn</sub> (A)	0.1
Tripping time	Instantaneous
Rated conditional short-circuit current I <sub>nc</sub> (kA)	10

Online product page

## Other documentation




[Technical data catalogue](#)  
[Certificate](#)  
[3D Model](#)  
[Instruction manual](#)  
[CE declaration](#)  
[Eplan file](#)

## ETIM international classification

Classification	EC000003
Class name	Residual current circuit breaker (RCCB)
Degree of protection (IP), front side	IP20
Number of knife blade fuse holders	3+N
Type of drive	50/60
Number of poles	4
Rated voltage	415V
Rated current	40A
Rated fault current	100mA
Mounting method	DIN rail
Leakage current type	AC
Selective protection	
Short-time delayed tripping	
Short-circuit breaking capacity (I <sub>cw</sub> )	10kA
Surge current capacity	0,4kA
Additional equipment possible	1
Degree of protection (IP)	IP20
Width in number of modular spacings	4
Built-in depth	68mm
Connectable conductor cross section multi-wired	1-25mm <sup>2</sup>

# Dimension drawing

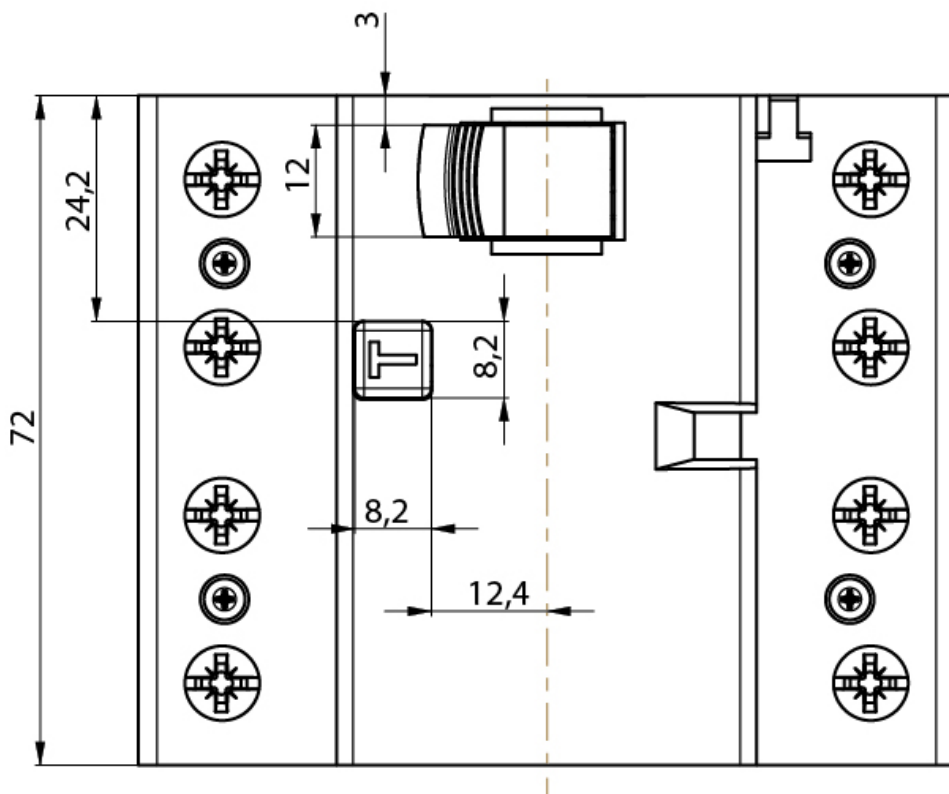



## Wiring diagram

